

you can
Canon

Laser Printers & All-in-Ones



Set your business free



From simple home offices to busy SMEs, there's no better business partner than i-SENSYS.



Iiona van Genderen Stort - 'Majestic Teton Peaks'

Building a business requires tools you can rely on. Tools suited to the needs of your growing business. Canon engineers invented the first desktop laser printer in 1982. Since then, we have relentlessly pursued our goal of creating the perfect product that would combine productivity, efficiency and pure peace of mind. The result is the i-SENSYS range of laser office equipment.

The range extends from colour and monochrome printers to compact All-in-Ones that let you print, copy, scan and fax in a single convenient machine. The i-SENSYS MF4690PL can even scan directly to e-mail, to a network folder or to a USB memory device with SEND functionality.

All i-SENSYS printers produce smoother text, cleaner curves and subtler greys. Selected models print in brilliant full colour. With virtually no warm-up time, i-SENSYS responds immediately to every task. And straightforward networking integrates seamlessly into your existing setup.

Whatever the job - from reports and labels to envelopes and transparencies - there's an i-SENSYS laser up to the job. Let us handle the everyday tasks, so you have the freedom to focus on the big picture. Freedom to expand your business horizons. Freedom to grow.

FAST

Quick First Print gets you going faster. On-Demand Fixing Technology replaces conventional thermal rollers and has virtually zero warm-up time. i-SENSYS can even share the task of image processing between PC and printer.

EFFICIENT

SEND functionality facilitates paperless document transfer. Scan documents and distribute them automatically to multiple network destinations all in one simple operation.

CONNECTED

PCL support on selected models integrates i-SENSYS into your existing network environment, adding valuable resources for the entire workplace. With just one cable and a single software installation, setup could not be simpler.

EASY TO REPLACE

i-SENSYS combines toner, photosensitive drum, electrostatic charger and cleaning unit in an all-in-one cartridge that simply clicks into place. Our cartridge recycling programme reuses or recycles 100% of each unit.

TRUSTED

Canon's long tradition of innovation is why we are a market leader in the number of patents registered year after year. We research and develop our own cutting-edge technology, so our products are ideally suited to your business needs.

RELIABLE

The optional Canon Easy Service Plan lets you choose the level of service you require. Choose from next-day on-site service, return-to-base service, or for those who fancy convenience, we even offer a one-time installation service.

RESPONSIBLE

Our patented On-Demand Fixing means i-SENSYS has zero warm-up time, using up to 75% less power than standard technologies. Energy-efficient charging virtually eliminates ozone emissions in the workplace.

Living the sweet life

Growing up in Amsterdam, Loes Kamsteeg learned to love Italian cinema. Working as a film producer in Rome, she learned to love an i-SENSYS LBP5300.

"Two things are absolutely indispensable here: my Vespa and my i-SENSYS. Things can get pretty hectic. The Vespa gets me around quick and the i-SENSYS gives me quick, full-colour laser prints of all our location photos, with virtually no warm-up time."

"Black-and-white prints are even quicker. In this business, things are always changing. The script is all we have to keep everyone on the same page. Automatic double-sided printing makes me feel better about the amount of paper we go through."



Laser Beam Printers



i-SENSYS LBP5360

Designed for demanding workgroups, this compact, robust and quiet colour laser printer offers high specification performance. Network ready, PCL compatible and easy to use and maintain it delivers fast, professional output with automatic double-sided printing.

- Compact Colour Laser Printer: 21 ppm in colour & mono
- Automatic double-sided printing as standard
- PCL5c/6 & UFR II* supported for maximum compatibility
- Quick First Print performance; no warm-up time from sleep mode
- Fast 10 second first print time
- Network ready
- 128MB standard, expandable up to 384MB. Optional 20GB hard disk drive
- 9600 x 600 dpi - print resolution
- Colour All-in-One cartridges
- 250-sheet cassette, 100-sheet multi-purpose tray and optional 500-sheet cassette (max. A4)
- Windows, Mac** and Linux** compatible

* Canon's own printer language
** See specifications



Liesbeth Lans - 'Playing in the snow'



i-SENSYS LBP5300

This quiet, network ready colour laser printer is designed for frequent, high-quality shared printing. The 21 ppm colour and mono output, large paper capacity, double-sided printing and maintenance-free colour All-in-One cartridges make it ideal for busy workgroups.

- Robust and compact Colour Laser Printer: 21 ppm in colour & mono
- Fast first colour print in approx. 10 seconds
- Maintenance free colour All-in-One cartridges containing S Toner for continuous professional quality
- 9600 x 600 dpi enhanced print resolution
- Zero warm-up time and quiet operation due to Colour On-Demand Fixing Technology
- Network ready with Remote User Interface (RUI)
- Automatic double-sided printing as standard
- Large paper capacity: 250-sheet cassette, 100-sheet multi-purpose tray and optional 500-sheet cassette (max. A4)
- USB2.0 Hi-Speed connection
- Windows, Mac* and Linux* compatible

* See specifications



Joel Santos - 'Ancient Memories'



i-SENSYS LBP5100

This compact colour laser printer delivers high quality output and impressive print speeds with quiet, easy operation. Built-in automatic duplexing allows the creation of more professional double-sided documents - while cutting down on paper costs.

- Compact and quiet Colour Laser Printer
- Impressive print speeds: 10 ppm in colour, 12 ppm in mono
- Built-in automatic double-sided printing
- 9600 x 600 dpi print resolution and S Toner for professional output with vivid, contrasting colours and sharp text
- Quick first print, zero warm-up time from sleep mode
- Fast first print out in approx. 20 seconds
- Colour All-in-One cartridges
- 250-sheet paper cassette plus optional 250-sheet cassette (max. A4)
- Small footprint with full frontal operation
- Network printing with optional NB-C2 Network card



i-SENSYS LBP5000

The Laser Shot i-SENSYS LBP5000 brings speed, simplicity and style to colour laser printing - with convenient, maintenance-free colour All-in-One cartridges. Benefit from fast, professional colour output at 8 ppm, with this smart, quiet and space-saving printer.

- Robust, smart and stylish desktop Colour Laser Printer
- Print speed: 8 ppm in colour & mono
- Maintenance-free with colour All-in-One cartridges
- Print quality: 600 x 600 dpi or 9600 x 600 dpi equivalent
- No warm-up time with Colour On-Demand Fixing Technology plus fast first colour print in under 20 seconds
- Paper capacity: 250 sheets plus optional 250-sheet cassette
- Space-saving design with full frontal operation
- Easy-to-use Windows graphical interface
- USB2.0 Hi-Speed connection between printer and PC
- Network printing with optional Canon Network Board NB-C2





i-SENSYS LBP3460

The compact Laser Shot i-SENSYS LBP3460 provides a complete out-of-the-box solution for professional quality laser printing. A fast 33 pages per minute print speed is combined with PCL5e/6 compatibility, built-in networking and duplexing and an extensive paper supply.

- 33 ppm heavy-duty Laser Printer
- PCL 5e/6 & UFR II* supported for maximum compatibility
- Built-in networking (TCP/IP) for sharing printer resources
- Built-in duplex unit to provide double sided printing
- No warm-up time and first print ready in 7.7 seconds or less
- Print quality: 600 x 600 dpi or 2400 x 600 dpi equivalent
- Maintenance-free All-in-One cartridge
- 250-sheet cassette and 100-sheet multi-purpose tray plus optional 500-sheet cassette
- USB2.0 Hi-Speed connection between printer and PC
- Stylish, space-saving design with full frontal operation

* Canon's own printer language



i-SENSYS LBP3360

Share productive, professional output with this solid and compact network-ready Laser Printer. Easy to use and maintain, it has a 21 ppm print speed, practical PCL5e/6 & UFR II* support, cost-saving automatic double-sided printing and an All-in-One cartridge.

- 21 pages per minute Laser Printer
- PCL 5e/6 & UFR II* supported for maximum compatibility
- Network ready: built-in interface card
- Built-in duplex unit for double-sided printing
- Virtually no warm-up time, first print out time in less than 9 seconds
- 2400 x 600 dpi enhanced print resolution
- All-in-One cartridge for consistent high quality output & maintenance-free operation. High yield replacement cartridge available.
- 250-sheet cassette + optional 250-sheet cassette (up to A4)
- Windows, Mac** & Linux** compatible; USB2.0 Hi-Speed
- Solid, stylish design with full frontal/top operation

* Canon's own printer language
** English only & web distribution only



Suzie Geenen – 'Luxemburg City'



i-SENSYS LBP3300

Benefit from a fast 21 pages per minute print speed and professional laser output with the Laser Shot i-SENSYS LBP3300. Productive features include standard double sided printing, a flexible paper supply and optional networking – in a space-saving and easy-to-use unit.

- High performance Laser Printer: 21 ppm
- Standard built-in duplex unit for double sided printing
- No warm-up time and first print ready in 9 seconds or less
- Print quality: 600 x 600 dpi or 2400 x 600 dpi equivalent
- Maintenance-free All-in-One cartridge
- Standard 250-sheet cassette plus optional 250-sheet cassette
- Superior processing speed due to CAPT* & SCoA**
- USB2.0 Hi-Speed connection between printer and PC
- Network printing with optional Canon Network Board NB-C2
- Stylish, space-saving design with full frontal operation

* CAPT = Canon Advanced Printing Technology
** SCoA = Smart Compression Architecture



i-SENSYS LBP3000

Get the print speed you need and the laser quality you expect, with the Laser Shot i-SENSYS LBP3000. Advanced Canon technologies ensure fast output, enhanced print quality and exceptional ease of use. Plus optional network printing makes it even more productive.

- Laser Printer with rapid print speed: 14 ppm
- No warm-up time or waiting with On-Demand Fixing Technology
- Fast first print out: under 9.3 seconds due to CAPT* & SCoA**
- All-in-One cartridge: easy to replace and ensures continuous high quality output
- High print quality: 600 x 600 dpi or 2400 x 600 dpi equivalent with Automatic Image Refinement
- Easy-to-use Windows graphical interface & 'sound assist' function
- Flexible paper handling and 150-sheet Multi Purpose Tray
- Optional network printing with AXIS 1650 Print Server
- Small, stylish and quiet in operation

* CAPT = Canon Advanced Printing Technology
** SCoA = Smart Compression Architecture



i-SENSYS LBP2900

The small, stylish Laser Shot i-SENSYS LBP2900 produces professional laser prints, quickly and quietly – without waiting and without any worries. Exceptionally easy to use, it delivers consistently high quality output thanks to Canon's convenient All-in-One cartridge.

- Affordable Laser Printer with fast print speed: 12 ppm
- No warm-up time or waiting with On-Demand Fixing Technology
- Fast first print out: under 9.3 seconds due to CAPT* & SCoA**
- All-in-One cartridge: easy to replace and ensures continuous high quality output
- High print quality: 600 x 600 dpi or 2400 x 600 dpi equivalent with Automatic Image Refinement
- Easy-to-use Windows graphical interface & 'sound assist' function
- Flexible paper handling and 150-sheet Multi Purpose Tray
- Optional network printing with AXIS 1650 Print Server
- Small, stylish and quiet in operation

* CAPT = Canon Advanced Printing Technology
** SCoA = Smart Compression Architecture



Laser All-in-Ones



i-SENSYS MF8180C

The Laser Shot i-SENSYS MF8180C provides professional colour laser printing, copying, scanning and faxing in one compact, cost-cutting unit with built-in networking to add to productivity. It's the ideal solution for all creative businesses where colour is critical.

- Desktop Colour Laser All-in-One: print, fax, copy, scan
- Printing at 2400 x 600 dpi (enhanced)
- 19 ppm/cpm in mono, 4 ppm/cpm in colour with no warm-up time and fast first print out
- Colour scanner: 9600 x 9600 dpi (enhanced)
- Super G3 faxing, 256-page* memory, Ultra High Quality imaging with 256 greyscales
- 50-page Automatic Document Feeder
- 250-sheet paper cassette, 125-sheet multi-purpose tray
- Standard built-in Ethernet interface for network printing/faxing
- Easy to replace toner and drum cartridges
- Simple installation and small footprint

* based on ITU-T Standard Chart No. 1



i-SENSYS MF6580PL

The Laser Shot i-SENSYS MF6580PL provides fast and high performance laser printing, faxing, copying and colour scanning. The built-in network capability makes it ideal for sharing in small and mid-sized offices.

- Network ready Laser All-In-One: print, fax, copy, scan
- Printer languages: PCL5e, PCL6, Canon UFR-II LT
- 22 ppm/cpm, 1200 x 600 dpi print resolution (enhanced)
- Super G3 fax modem – 1280-page* fax memory and UHQ technology
- Colour scanner – 9600 x 9600 dpi (enhanced)
- 50-page Duplex Automatic Document Feeder & built-in duplex unit for double sided printing and copying
- 500-sheet paper cassette plus 100-sheet multi purpose tray
- All-in-One cartridge
- USB2.0 Hi-Speed interface

* based on ITU-T Standard Chart No. 1



Ingo Arndt - 'Mealy Parrot Meal'



i-SENSYS MF6560PL

i-SENSYS MF6550

The Laser Shot i-SENSYS MF6560PL/ MF6550 deliver high-speed and high-quality and provide the perfect solution for small and mid-sized businesses that need a complete print and communication centre.

- Laser All-In-One: print, fax, copy, scan
- Printer languages: PCL5e, PCL6 (MF6560PL), Canon UFR-II LT
- 22 ppm/cpm, 1200 x 600 dpi print resolution (enhanced)
- Super G3 fax modem – 1280-page* (MF6560PL)/256-page* (MF6550) fax memory and UHQ technology
- Colour scanner – 9600 x 9600 dpi (enhanced)
- 50-page Duplex Automatic Document Feeder & built-in duplex unit for double sided printing and copying
- 500-sheet paper cassette plus 100-sheet multi purpose tray
- All-in-One cartridge
- Optional network connectivity with AXIS 1650 Print Server

* based on ITU-T Standard Chart No. 1




i-SENSYS MF6540PL

i-SENSYS MF6530

Benefit from fast, high quality laser printing, copying and colour scanning with the Laser Shot i-SENSYS MF6540PL and MF6530. Save time, space and money with these robust, yet stylish All-In-Ones, increasing productivity in small and mid-sized offices.

- Laser All-In-One: print, copy, scan
- Printer languages: PCL5e, PCL6 (MF6540PL), Canon UFR-II LT
- 22 ppm/cpm, 1200 x 600 dpi print resolution (enhanced)
- Colour scanner – 9600 x 9600 dpi (enhanced)
- 50-page Duplex Automatic Document Feeder & built-in duplex unit for double sided printing and copying
- 500-sheet paper cassette plus 100-sheet multi purpose tray
- All-in-One cartridge & USB2.0 Hi-Speed interface
- Robust, space-saving design
- Optional network connectivity with AXIS 1650 Print Server

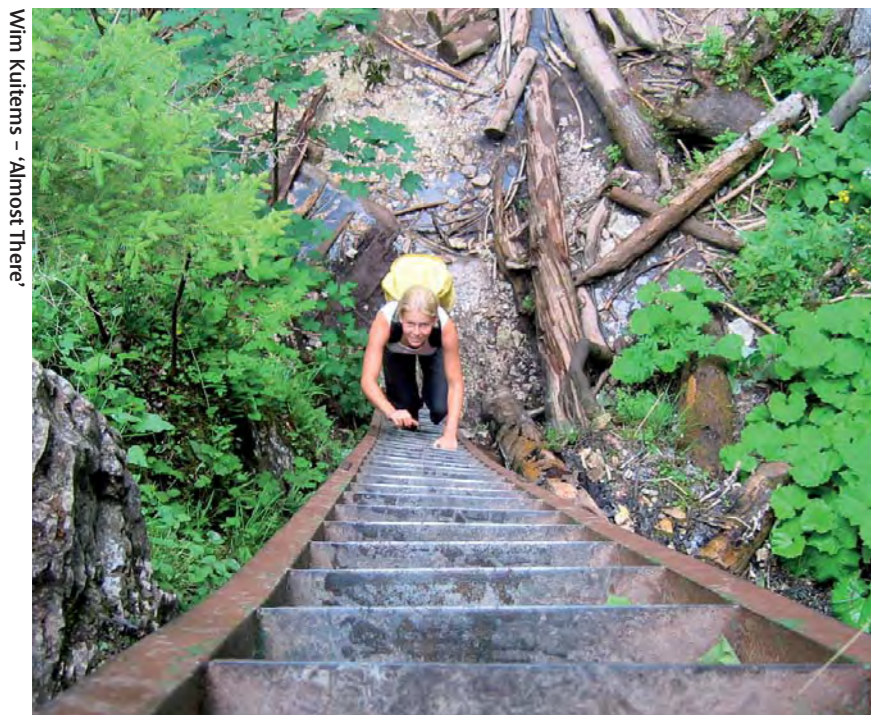

Wim Kuitens - 'Almost There'



i-SENSYS
MF4690PL

This compact and versatile laser All-in-One, with Super G3 fax, delivers high quality professional output. Maximum workgroup productivity is ensured with built-in networking, auto-duplexing, and SEND functionality to email, network and USB memory device.

- Compact laser All-in-One: printer, fax, copier & colour scanner
- Built-in automatic double-sided printing
- Built-in networking
- SEND functionality: scan documents direct to email, network, fax or a USB memory device
- PCL5e/6 & UFR II* support
- 128 MB memory as standard
- Super G3 fax modem with Department ID management security, a 256-page** fax memory & UHQ 256 greyscales
- Virtually no warm-up time: first copy in 8.5 seconds
- 20 ppm/cpm, 1200 x 600 dpi print resolution
- 35-sheet ADF
- All-in-One Cartridge
- Windows & Mac*** compatible

* Canon's own printer language
** based on ITU-T Standard Chart No. 1
*** See specifications



i-SENSYS
MF4660PL

This high quality, laser All-in-One with built-in networking offers print, copy and colour scan functionality in a compact and stylish unit. Cut paper costs and produce more professional documents and booklets with built-in automatic double-sided printing.

- Compact and stylish laser All-in-One: printer, copier and colour scanner
- Built-in automatic double-sided printing
- Built-in networking
- PCL5e/6 & UFR II* support for maximum compatibility
- Department ID management security to control copying costs
- 128MB memory as standard
- Virtually no warm-up time: first copy in 8.5 seconds
- 20 ppm/cpm, 1200 x 600 dpi print resolution
- 35-sheet ADF
- Colour scanner: 9600 x 9600 dpi enhanced, save to PDF functionality
- All-in-One Cartridge
- Windows & Mac** compatible

* Canon's own printer language
** See specifications



Jessie Hillebrand - 'Kimontone'



i-SENSYS
MF4150

This compact Laser All-in-One provides high quality printing, faxing, copying and colour scanning - with a 35-sheet Automatic Document Feeder and automatic double-sided printing. Easy to use and maintain, it offers optional networking for shared productivity.

- Compact and stylish Laser All-in-One: printer, fax, copier and colour scanner
- Virtually no warm-up time - First copy output time in less than 10 seconds
- 20 ppm/cpm, 1200 x 600 dpi printing (enhanced)
- Super G3 fax modem, 256-page* fax memory, UHQ 256 greyscales
- Colour scanner: 9600 x 9600 dpi enhanced, save to PDF functionality
- Productive 35-sheet Automatic Document Feeder and 250-sheet paper cassette (max. A4)
- Automatic double-sided printing as standard
- All-in-One Cartridge: continuous high quality and maintenance-free operation
- Windows & Mac compatible;** USB2.0 Hi-Speed

* based on ITU-T Standard Chart No. 1
** See specifications



i-SENSYS
MF4140

Make quick, high quality laser prints and copies, fax perfectly and scan in colour. Handle everything easily with this compact laser All-in-One. Save time and cut paper costs with automatic double-side printing. Optional networking adds to productivity.

- Laser All-in-One: printer, fax, copier and colour scanner
- Virtually no warm-up time - First copy output time in less than 10 seconds
- 20 ppm/cpm, 1200 x 600 dpi printing (enhanced)
- Super G3 fax modem, 3 seconds per page* transmission 256-page* fax memory, UHQ technology with 256 greyscales
- Colour scanner: 9600 x 9600 dpi enhanced, save to PDF functionality
- Automatic double-sided printing as standard
- 250-sheet paper cassette (max. A4)
- All-in-One Cartridge: continuous high quality and maintenance-free operation
- Windows & Mac compatible;** USB2.0 Hi-Speed
- Compact, stylish design

* based on ITU-T Standard Chart No. 1
** See specifications



i-SENSYS
MF4120



Take advantage of quick, high quality laser printing, copying and colour scanning that is affordable and easy to use. This compact All-in-One features automatic double-sided printing to cut paper costs and save time. Optional networking enhances productivity.

- Affordable Laser All-in-One: printer, copier and colour scanner
- Virtually no warm-up time - first copy output time in less than 10 seconds
- 20 prints/copies per minute
- 1200 x 600 dpi printing (enhanced)
- Colour scanner: 9600 x 9600 dpi enhanced, save to PDF functionality
- Automatic double-sided printing as standard
- 250-sheet paper cassette (max. A4)
- All-in-One Cartridge: continuous high quality and maintenance free operation
- Windows & Mac compatible;* USB2.0 Hi-Speed
- Stylish and compact with small footprint

* See specifications



Laser Beam Printers Specifications Chart






				
PRINTING METHOD AND QUALITY				
Printing Method	Colour Laser beam printing with built-in duplex unit	Colour Laser beam printing with built-in duplex unit	Colour Laser beam printing with built-in duplex unit	Colour Laser beam printing
Printer Language	PCL5e/PCL6 and UFR II	CAPT (Canon Advanced Printing Technology)	CAPT (Canon Advanced Printing Technology)	CAPT (Canon Advanced Printing Technology)
Resolution	600 x 600 dpi (Max. 9600 x 600 dpi with AIR)	600 x 600 dpi (Max. 9600 x 600 dpi with AIR)	600 x 600 dpi (Max. 9600 x 600 dpi with AIR)	600 x 600 dpi (Max. 9600 x 600 dpi with AIR)
PRINT SPEED				
Mono Text	Mono: 21 ppm A4 Colour: 21 ppm A4	Mono: 21 ppm A4 Colour: 21 ppm A4	Mono: 12 ppm A4 Colour: 10 ppm A4	Mono: 8 ppm A4 Colour: 8 ppm A4
Duty Cycle	60,000 pages per month (Max.)	55,000 pages per month (Max.)	35,000 pages per month (Max.)	Note 1
MEDIA HANDLING AND SUPPORT				
Paper Size	A4, B5, A5, Legal, Letter, Executive, Statement, 8.5 x 13, 16K, Envelope C5/COM10/DL, Monarch, B5, Index Card, Custom paper (width 76.2 - 215.9mm, length 127.0 - 355.6mm)	A4, B5, A5, Legal, Letter, Executive, Statement, 8.5 x 13, 16K, Envelope C5/COM10/DL, Monarch, B5, Index Card, Custom paper (width 76.2 - 215.9mm, length 127.0 - 355.6mm)	A4, B5, A5, Legal, Letter, Executive, Envelope C5/COM10/DL, Monarch, B5, Index Card, Custom paper (width 76.2 - 215.9mm, length 127.0 - 355.6mm)	A4, B5, A5, Letter, Executive, Envelope C5/COM10/DL, Monarch, B5, Index Card, Custom paper (width 76.2 - 215.9mm, length 127.0 - 355.6mm)
Media Weight	64 - 135g/m ²	64 - 135g/m ²	64 - 135g/m ²	64 - 135g/m ²
Media Handling	250 sheet paper cassette/ 100 sheets Multipurpose tray (64g/m ²) (+500 sheet optional cassette)	250 sheet paper cassette/ 100 sheets Multipurpose tray (64g/m ²) (+500 sheet optional cassette)	250 sheet paper cassette/ single sheet Multipurpose tray (+250 sheet optional cassette)	250 sheet paper cassette/ 1-sheet manual (+250-sheet optional cassette)
Paper Output	200 sheets	200 sheets	125 sheets (face-down)	125 sheets (face-down)
Memory	128MB SDRAM Standard (expandable up to 384MB)	16MB SDRAM + Hi-SCoA	16MB SDRAM + Hi-SCoA	8MB + SCoA
TONER CARTRIDGE INFORMATION				
Toner Cartridge Life	Cartridge 711 Blk: 6,000 pages Cartridge 711 C/M/Y: 6,000 pages (A4, at 5% coverage)	Cartridge 711 Blk: 6,000 pages (A4, at 5% coverage) Cartridge 711 C/M/Y: 6,000 pages (A4, at 5% coverage)	Cartridge 707 Blk: 2,500 pages Cartridge 707 C/M/Y: 2,000 pages (A4, at 5% coverage)	Cartridge 707 Blk: 2,500 pages (A4, at 5% coverage) Cartridge 707 C/M/Y: 2,000 pages (A4, at 5% coverage)
DEVICE CHARACTERISTICS				
Interface	Standard: USB 2.0 Hi-Speed, IEEE1284 (Parallel)	Standard: USB 2.0 Hi-Speed	Standard: USB 2.0 Hi-Speed	Standard: USB 2.0 Hi-Speed
Dimensions (W x D x H)	412 x 470.7 x 453mm	412 x 470.7 x 453mm	407 x 365 x 395mm	407 x 365 x 374mm
Weight	Approx. 22kg (without cartridge)	Approx. 22kg (without cartridge)	Approx. 18kg (without cartridge)	Approx. 16kg (without cartridge)
POWER				
Consumption	Standby Approx. 45W Printing Approx. 416W	Approx. 45W Approx. 415W	16W 340W	Approx. 18W Approx. 207W
Acoustic Noise Levels	Max. 53dB(A) or less (during operation) 35dB(A) or less (during standby)	Max. 53dB(A) or less (during operation)	During standby: background noise level, During operation: 50dB(A) or less	Max. 50dB(A) or less (during operation)
OPERATING ENVIRONMENT				
Temperature Range	10 - 30°C	10 - 30°C	10 - 30°C	10 - 30°C
Humidity	10 - 80% RH	10 - 80% RH	10 - 80% RH	10 - 80% RH
OPERATING SYSTEM REQUIREMENTS				
Operating Systems	Windows® 98/SE/ME/2000/XP/ Vista-/Server 2003/Win x64 bit/ Mac OS X 10.2.8-10.4.6 (online distribution only) and Linux (English and online distribution only) With Server-Based Computing Environment. Compatible Windows Terminal Server (Service): Microsoft Windows 2000 Server, Server 2003. Compatible Software: Citrix MetaFrame 1.8, Presentation server 3.0 and 4.0 Compatible Microsoft Cluster Server (MSCS): Microsoft Windows 2000 Advanced Server, Server 2003 Enterprise Edition	Windows® 98/ME/NT 4.0/2000/XP/ Vista-/Server 2003/ Mac OS X v10.3.9 or later (online distribution only)/Linux (English and online distribution only)	Windows® 98/ME/2000/Server 2003/XP/ Vista-/Mac OS version 10.4 or later (online distribution only), Linux (English and online distribution only)	Windows® 98/ME/2000/XP/ Vista-/Server 2003/Mac Power PC: OS X (Version v10.3.x, v10.4), Mac Intel: OS X/1.4.X, (English and online distribution only)/Linux (English and online distribution only)
Network Connectivity	Canon 10Base-T/100Base-TX	Canon 10Base-T/100Base-TX	Optional Canon Network Board NB-C2	Optional Canon Network Board NB-C2

Standard disclaimer
a All specifications subject to change without notice

Footnotes
1 Specification not available at time of print
2 For details on Vista support check <http://www.canon-europe.com/vista>

3 Based on ITU-T Chart No.1
4 Cartridge 701 BLK 5,000 pages at 5% coverage
Cartridge 701L Cya/Mag/Yel - 2,000 pages at 5% coverage (Included with machine)
Cartridge 701 Cya/Mag/Yel - 4,000 pages at 5% coverage
Drum cartridge 701 - 20000 pages mono / 5000 pages colour

Laser Beam Printers Specifications Chart

					
PRINTING METHOD AND QUALITY					
Printing Method	Monochrome Laser beam printing with built-in duplex unit	Monochrome Laser beam printing with built-in duplex unit	Monochrome Laser beam printing with built-in duplex unit	Monochrome Laser beam printing	Monochrome Laser beam printing
Printer Language	PCL5e/PCL6 and UFR II	PCL5e/PCL6 and UFR II	CAPT (Canon Advanced Printing Technology)	CAPT (Canon Advanced Printing Technology)	CAPT (Canon Advanced Printing Technology)
Resolution	600 x 600 dpi (Max. 2400 x 600 dpi with AIR)	600 x 600 dpi (Max. 2400 x 600 dpi with AIR)	600 x 600 dpi (Max. 2400 x 600 dpi with AIR)	600 x 600 dpi (Max. 2400 x 600 dpi with AIR)	600 x 600 dpi (Max. 2400 x 600 dpi with AIR)
PRINT SPEED					
Mono Text	33 ppm A4	21 ppm A4	21 ppm A4	14 ppm A4	12 ppm A4
Duty Cycle	90,000 pages per month (Max.)	10,000 pages per month (Max.)	8,000 pages per month (Max.)	5,000 pages per month (Max.)	Note 1
MEDIA HANDLING AND SUPPORT					
Paper Size	A4, B5, A5, Letter, Executive, Envelope C5/COM10/DL, Monarch, B5, Custom paper (width 76.2 - 215.9mm, length 127.0 - 355.6mm)	A4, B5, A5, Letter, Executive, Envelope C5/COM10/DL, Monarch, B5, Index Card, Custom paper (width 76.2 - 215.9mm, length 127.0 - 355.6mm)	A4, B5, A5, LTR, Executive, Envelope C5/COM10/DL, Monarch, B5, Index Card, Custom paper (width 76.2 - 215.9mm, length 127.0 - 355.6mm)	Multipurpose tray: A4, B5, A5, LTR, Executive, Envelope C5/COM10/DL, Monarch, Custom Paper (width 76.2 - 215.9mm, length 127.0 - 355.6mm) for Manual Feed only	Multipurpose tray: A4, B5, A5, LTR, Executive, Envelope C5/COM10/DL, Monarch, Custom Paper (width 76.2 - 215.9mm, length 127.0 - 355.6mm) for Manual Feed only
Media Weight	64 - 135 g/m ²	64 - 135 g/m ²	64 - 135 g/m ²	64 - 163 g/m ²	64 - 163 g/m ²
Media Handling	250 sheet paper cassette/ 100 sheets Multipurpose tray (+500-sheet cassette optional)	250 sheet paper cassette/ 1-sheet manual sheet slot	250 sheet paper cassette/ 1-sheet manual sheet slot	Multipurpose tray: approx. 150 sheets	Multipurpose tray: approx. 150 sheets
Paper Output	250 sheets (face-down)	125 sheets (face-down) 1 sheet (+250-sheet optional cassette)	125 sheets (face-down) 1 sheet (face-up)	100 sheets (face-down)	100 sheets (face-down)
Memory	64MB SDRAM, Expandable up to 320MB	64MB	8MB + SCoA	2MB + SCoA	2MB + SCoA
TONER CARTRIDGE INFORMATION					
Toner Cartridge Life	Cartridge 710: 6,000 pages Cartridge 710H: 12,000 pages (A4, based on ISO/IEC19752)	Cartridge 708: 2,500 pages Cartridge 708H: 6,000 pages (A4, based on ISO/IEC19752)	Cartridge 708: 2,500 pages Cartridge 708H: 6,000 pages (A4, based on ISO/IEC19752)	Cartridge 703: 2,000 pages (A4, based on ISO/IEC19752)	Cartridge 703: 2,000 pages (A4, based on ISO/IEC19752)
DEVICE CHARACTERISTICS					
Interface	Standard: USB 2.0 Hi-Speed	Standard: USB 2.0 Hi-Speed	Standard: USB 2.0 Hi-Speed	Standard: USB 2.0 Hi-Speed	Standard: USB 2.0 Hi-Speed
Dimensions (W x D x H)	445 x 410 x 273mm	400 x 376 x 255mm	369.7 x 257.7 x 375.7mm	370 x 251 x 217mm	370 x 251 x 217mm
Weight	Approx. 16.1kg (without cartridge)	Approx. 12kg (without cartridge)	Approx. 11kg (without cartridge)	5.7kg (without cartridge)	5.7kg (without cartridge)
POWER					
Consumption	Standby Approx. 11W Printing Approx. 572W	Approx. 11W Approx. 400W	Approx. 4W Approx. 436W	Approx. 2W Approx. 259W	Approx. 2W Approx. 259W
Acoustic Noise Levels	Max. 52dB(A) or less (during operation)	Max. 50.9dB(A) or less (during operation)	Max. 52.8dB(A) or less (during operation)	Max. 48dB	Max. 48dB
OPERATING ENVIRONMENT					
Temperature Range	10 - 30°C	10 - 32°C	10 - 32°C	10 - 32.5°C	10 - 32.5°C
Humidity	10 - 80% RH	20 - 80% RH	20 - 80% RH	20 - 80% RH	20 - 80% RH
OPERATING SYSTEM REQUIREMENTS					
Operating Systems	Windows® 98/SE/ME/2000/XP/ Vista-/Server 2003/Win x64 bit/ Mac OS X 10.2.8-10.4.6 (online distribution only) and Linux (English and online distribution only) With Server-Based Computing Environment. Compatible Windows Terminal Server (Service): Microsoft Windows 2000 Server, Server 2003. Compatible Software: Citrix MetaFrame 1.8, Presentation server 3.0 and 4.0 Compatible Microsoft Cluster Server (MSCS): Microsoft Windows 2000 Advanced Server, Server 2003 Enterprise Edition (Netware option)	Windows® 98/SE/ME/2000/XP/ Vista-/Server 2003/Win x64 bit/ Mac OS X 10.2.8 or later (online distribution only) and Linux (English and online distribution only) With Server-Based Computing Environment. Compatible Windows Terminal Server (Service): Microsoft Windows 2000 Server, Server 2003. Compatible Software: Citrix MetaFrame 1.8, Presentation server 3.0 and 4.0 Compatible Microsoft Cluster Server (MSCS): Microsoft Windows 2000 Advanced Server, Server 2003 Enterprise Edition	Windows® 98/ME/2000 Professional/XP/ Vista-/ Server 2003/Linux (English and online distribution only)	Windows® 98/ME/2000 Professional/XP/ Vista-/ Linux (English and online distribution only)	Windows® 98/ME/2000 Professional/XP/ VISTA - / Linux (English and online distribution only)
Network Connectivity	Canon 10Base-T/100Base-TX	Built-in 10Base-T/100Base-TX	Canon 10/100Base-TX Ethernet Board NB-C2 as option	Optional Axis 1650 10/100Base-TX Network Server	Optional Axis 1650 10/100Base-TX Network Server

Laser All-in-Ones Specifications Chart



	i-SENSYS MF8180C	i-SENSYS MF6580PL
TYPE		
Machine Type	Colour laser Flatbed All-in-One	Laser Flatbed All-in-One
Available Functions	Colour Print, Colour Scan, Colour Copy, Fax (+Network & ADF)	Print, Fax, Copy, Colour Scan (+Network & Duplex ADF)
Paper Scanning Type	Flatbed and Automatic Document Feeder	Flatbed and Automatic Document Feeder
PRINTER FUNCTIONS		
Printing Method	Colour Laser beam printing	Monochrome Laser beam printing with built-in duplex unit
Printer Language	CARPS (Canon Advanced Raster Printing System)	PCL5e/6, GDI (Canon UFR-II LT) printer language
Print Speed	19 ppm mono/4 ppm colour	22 ppm
Duty Cycle	30,000 pages per month (max.)	15,000 pages per month (max.)
Print Resolution	600 x 600 dpi	600 x 600 dpi
Printer Memory	128MB (shared)	128MB (shared)
Cartridges	Note 4	Cartridge 706
Yield	Blk 5,000 pages - C/M/Y 4,000 pages - Drum cartridge 20,000 pages mono/5,000 pages colour (A4, at 5% coverage)	5,000 pages (based on ISO/IEC19752)
Smoothing	2400 x 600 dpi	1200 x 600 dpi
Paper Capacity	250 sheets cassette + 125 sheets Multipurpose tray	500 sheets cassette + 100 sheets Multipurpose tray (+500 sheet optional cassette)
Paper Size	A4, LTR, LGL, Envelope (COM10, Monarch, DL, ISO-5)	A4, LTR, LGL, Envelope (COM10, Monarch, DL, ISO-5)
Printing Width	216mm	216mm
Toner Saver Mode	YES (for mono printing only)	YES
FAX FUNCTIONS		
Stand-alone Fax	YES	YES
PC Fax	YES (TX only)	YES (TX only)
Transmission Speed	Approx. 3 seconds per page (based on ITU-T Standard Chart No. 1)	Approx. 3 seconds per page (based on ITU-T Standard Chart No.1)
Modem Speed	Super G3, 33.6Kbps	Super G3, 33.6Kbps
Compression Method	MH, MR, MMR, JBIG	MH, MR, MMR, JBIG
Fax Resolution	Standard, Fine, Super Fine, Ultra Fine	Standard, Fine, Super Fine, Ultra Fine
Image Processing System	UHQ	UHQ
Half-tone	256 grey scale	256 grey scale
Automatic Document Feeder	50 pages	50 pages (Duplex)
Memory Transmission	YES	YES
Fax Memory	256 pages	1,280 pages as max.
Memory Back-up	YES (1 hour)	YES (1 hour)
Dual Access	YES	YES
One-touch Dials/Coded Dials	18/100	23/100
Group Dial	117	122
Redial	YES	YES
Answering Machine Hook-up	YES	YES
Remote Reception	YES	YES
Sequential Broadcast	YES (Max. 119 destinations)	YES (Max. 124 destinations)
Error Correction Mode (ECM)	YES	YES
Memory Reception	YES	YES
Polling	YES (Manual RX only)	YES (Manual RX only)
SCANNER FUNCTIONS		
Scanner Type	Colour Flatbed	Colour Flatbed
Scanner Resolution	1200 x 2400 dpi (9600 x 9600 dpi enhanced)	600 x 600 dpi (9600 x 9600 dpi enhanced)
Colour Scanning Depth	48 bit/24 bit (in/out)	24 bit/24 bit (in/out)
Greyscale Gradation	256 grey scale	256 grey scale
Compatibility	TWAIN, WIA	TWAIN, WIA
OCR Bundle	YES	YES
COPIER FUNCTIONS		
Copy Resolution	600 x 600 dpi	600 x 600 dpi
Copy Modes	Text, Photo, Text and Photo	Text, Photo, Text and Photo
Copy Speed	19 copies per minute (mono), 4 copies per minute (colour)	22 copies per minute
Multiple Copy	Up to 99 copies	Up to 99 copies
Zoom Ratio	50 - 200%	50 - 200%
First Copy Output Time (FCOT)	Approx. 22 seconds	Approx. 8 seconds
Other Features	Auto Exposure, Collate Copy, Reserve Copy	2-in-1 copy, Duplex copy
PC INTERFACE AND SOFTWARE		
Interface Type	USB 2.0 Hi-Speed	USB 2.0 Hi-Speed
Supported OS	Windows® 98/ME/2000/XP/Vista™/2003 server (network connection only)	Windows® 98/ME/2000/XP/Vista™, MAC OS X 10.2.8 - 10.4.6 (online distribution only. Printing and PC faxing, no scanning) Linux print drivers (English only, online distribution only)
Scan to E-mail	YES	YES
Bundled Software	Presto! PageManager, ScanSoft OmniPage SE	Presto! PageManager, ScanSoft Omnipage SE
NETWORK FEATURES		
Network Connectivity	YES (built-in) (Network: Print and PC Fax only)	YES (built-in) (Network: Print and PC Fax only)
Type	Ethernet (10BaseT/100BaseT)	Ethernet (10BaseT/100BaseT)
Network Protocols	TCP/IP, DHCP, BOOTP, RARP, ICMP, DNS, Fixed Address, HTTP)	TCP/IP, DHCP, BOOTP, RARP, ARP+PING, DNS, WINS, IPBlock)
Others	—	—
GENERAL SPECIFICATIONS		
Number of Language (LCD message)	15 languages	24 languages
Dimensions without Trays (W x D x H)	510 x 512 x 588mm	520 x 420 x 451.9mm
Dimensions with Trays (W x D x H)	510 x 512 x 641mm	520 x 420 x 451.9mm
Weight	Approx. 36kg	23.7kg
Power Source	200 - 240V AC, 50 - 60Hz	200 - 240V AC, 50 - 60Hz
Power Consumption	Max.: Approx. 1200W Standby: Approx. 35W	Max.: Approx. 900W Standby: Approx. 20W
Acoustic Noise Levels	Standby: under 35dB(A) max. During operation: under 54dB(A) max.	Standby: under 43dB(A) During operation: under 66dB(A)

Laser All-in-Ones Specifications Chart



	i-SENSYS MF6560PL/MF6550	i-SENSYS MF6540PL/MF6530
TYPE		
Machine Type	Laser Flatbed All-in-One	Laser Flatbed All-in-One
Available Functions	Print, Fax, Copy, Colour Scan (& Duplex ADF)	Print, Copy, Colour Scan (& Duplex ADF)
Paper Scanning Type	Flatbed and Automatic Document Feeder	Flatbed and Automatic Document Feeder
PRINTER FUNCTIONS		
Printing Method	Monochrome Laser beam printing with built-in duplex unit	Monochrome Laser beam printing with built-in duplex unit
Printer Language	PCL5e/6 (MF6560PL), GDI (Canon UFR-II LT) printer language	PCL5e/6 (MF6540PL), GDI (Canon UFR-II LT) printer language
Print Speed	22 ppm	22 ppm
Duty Cycle	15,000 pages per month (Max.)	15,000 pages per month (Max.)
Print Resolution	600 x 600 dpi	600 x 600 dpi
Printer Memory	128MB (MF6560PL, shared); 64MB (MF6550, shared)	128MB (MF6540PL, shared); 64MB (MF6530, shared)
Cartridges	Cartridge 706	Cartridge 706
Yield	5,000 pages (based on ISO/IEC19752)	5,000 pages (based on ISO/IEC19752)
Smoothing	1200 x 600 dpi	1200 x 600 dpi
Paper Capacity	500 sheets cassette + 100 sheets Multipurpose tray (+500 sheet optional cassette)	500 sheets cassette + 100 sheets Multipurpose tray (+500 sheet optional cassette)
Paper Size	A4, LTR, LGL, Envelope (COM10, Monarch, DL, ISO-5)	A4, LTR, LGL, Envelope (COM10, Monarch, DL, ISO-5)
Printing Width	216mm	216mm
Toner Saver Mode	YES	YES
FAX FUNCTIONS		
Stand-alone Fax	YES	—
PC Fax	YES (TX only)	—
Transmission Speed	Approx. 3 seconds per page (based on ITU-T Standard Chart No.1)	—
Modem Speed	Super G3, 33.6Kbps	—
Compression Method	MH, MR, MMR, JBIG	—
Fax Resolution	Standard, Fine, Super Fine, Ultra Fine	—
Image Processing System	UHQ	—
Half-tone	256 grey scale	—
Automatic Document Feeder	50 pages (Duplex)	—
Memory Transmission	YES	—
Fax Memory	1,280 pages as max. (MF6560PL); 256 pages as max. (MF6550)	—
Memory Back-up	YES (1 hour)	—
Dual Access	YES	—
One-touch Dials/Coded Dials	23/100	—/—
Group Dial	122	—
Redial	YES	—
Answering Machine Hook-up	YES	—
Remote Reception	YES	—
Sequential Broadcast	YES (Max. 124 destinations)	—
Error Correction Mode (ECM)	YES	—
Memory Reception	YES	—
Polling	YES (Manual RX only)	—
SCANNER FUNCTIONS		
Scanner Type	Colour Flatbed	Colour Flatbed
Scanner Resolution	600 x 600 dpi (9600 x 9600 dpi enhanced)	600 x 600 dpi (9600 x 9600 dpi enhanced)
Colour Scanning Depth	24 bit/24 bit (in/out)	24 bit/24 bit (in/out)
Greyscale Gradation	256 grey scale	256 grey scale
Compatibility	TWAIN, WIA	TWAIN, WIA
OCR Bundle	YES	YES
COPIER FUNCTIONS		
Copy Resolution	600 x 600 dpi	600 x 600 dpi
Copy Modes	Text, Photo, Text and Photo	Text, Photo, Text and Photo
Copy Speed	22 copies per minute	22 copies per minute
Multiple Copy	Up to 99 copies	Up to 99 copies
Zoom Ratio	50 - 200%	50 - 200%
First Copy Output Time (FCOT)	Approx. 8 seconds	Approx. 8 seconds
Other Features	2-in-1 copy, Duplex copy	2-in-1 copy, Duplex copy
PC INTERFACE AND SOFTWARE		
Interface Type	USB 2.0 Hi-Speed	USB 2.0 Hi-Speed
Supported OS	Windows® 98/ME/2000/XP/Vista™, MAC OS X 10.2.8 - 10.4.6 (online distribution only. Printing and PC faxing, no scanning) Linux print drivers (English only, online distribution only)	Windows® 98/ME/2000/XP/Vista™, Mac OS X (Version 10.2.8 or later, online distribution only. Printing only), Linux print drivers (English only, online distribution only)
Scan to E-mail	YES	YES
Bundled Software	Presto! PageManager, ScanSoft Omnipage SE	Presto! PageManager, ScanSoft Omnipage SE
NETWORK FEATURES		
Network Connectivity	YES (Optional: AXIS Network Print Server)	YES (Optional: AXIS Network Print Server)
Type	Ethernet (10BaseT/100BaseT)	Ethernet (10BaseT/100BaseT)
Network Protocols	TCP/IP, IPX/SPX, IP	TCP/IP, IPX/SPX, IP
Others	—	—
GENERAL SPECIFICATIONS		
Number of Language (LCD message)	24 languages	24 languages
Dimensions without Trays (W x D x H)	520 x 420 x 451.9mm	520 x 420 x 451.9mm
Dimensions with Trays (W x D x H)	520 x 420 x 451.9mm	520 x 420 x 451.9mm
Weight	23.7kg	23.7kg
Power Source	200 - 240V AC, 50 - 60Hz	200 - 240V AC, 50 - 60Hz
Power Consumption	Max.: Approx. 900W Standby: Approx. 20W	Max.: Approx. 900W Standby: Approx. 20W
Acoustic Noise Levels	Standby: under 43dB(A) During operation: under 66dB(A)	Standby: under 43dB(A) During operation: under 66dB(A)

Laser All-in-Ones Specifications Chart



	i-SENSYS MF4690PL	i-SENSYS MF4660PL	i-SENSYS MF4150
TYPE			
Machine Type	Laser Flatbed All-in-One	Laser Flatbed All-in-One	Laser Flatbed All-in-One
Available Functions	Print, Fax, Copy, Colour Scan (+Network & ADF & SEND)	Print, Copy, Colour Scan (+Network & ADF)	Print, Copy, Colour Scan, Fax (+ADF)
Paper Scanning Type	Flatbed and Automatic Document Feeder	Flatbed and Automatic Document Feeder	Flatbed and Automatic Document Feeder
PRINTER FUNCTIONS			
Printing Method	Monochrome Laser beam printing with built-in duplex unit	Monochrome Laser beam printing with built-in duplex unit	Monochrome Laser beam printing with built-in duplex unit
Printer Language	PCL5e/6 and Canon UFR II LT	PCL5e/6 and Canon UFR II LT	Canon UFR II LT
Print Speed	20 ppm	20 ppm	20 ppm
Duty Cycle	10,000 pages per month (max.)	10,000 pages per month (max.)	10,000 pages per month (max.)
Print Resolution	600 x 600 dpi	600 x 600 dpi	600 x 600 dpi
Printer Memory	128MB (shared)	128MB (shared)	32MB (shared)
Cartridges	FX-10 Cartridge	FX-10 Cartridge	FX-10 Cartridge
Yield	2,000 pages (based on ISO/IEC19752)	2,000 pages (based on ISO/IEC19752)	2,000 pages (based on 5% coverage A4)
Smoothing	1200 x 600 dpi	1200 x 600 dpi	1200 x 600 dpi
Paper Capacity	250 sheet cassette + 1 sheet manual Multipurpose tray + 35 sheet Automatic Document Feeder	250 sheet cassette + 1 sheet manual Multipurpose tray + 35 sheet Automatic Document Feeder	250 sheet cassette + 1 sheet manual Multipurpose tray + 35 sheet Automatic Document Feeder
Paper Size	LTR, LGL, A4, B5, A5, Executive, Envelope (COM10, Monarch, DL, ISO-C5)	LTR, LGL, A4, B5, A5, Executive, Envelope (COM10, Monarch, DL, ISO-C5)	LTR, LGL, A4, B5, A5, Executive, Envelope, Index Cards
Printing Width	216mm	216mm	216mm
Toner Saver Mode	YES	YES	YES
FAX FUNCTIONS			
Stand-alone Fax	YES	NO	YES
PC Fax	YES	—	YES
Transmission Speed	Approx. 3 seconds per page (based on ITU-T Chart No.1)	—	Approx. 3 seconds per page (based on ITU-T Chart No.1)
Modem Speed	Super G3, 33.6 Kbps	—	Super G3, 33.6 Kbps
Compression Method	MH, MR, MMR, JBIG	—	MH, MR, MMR
Fax Resolution	Standard, Fine, Super Fine	—	Standard, Fine, Super Fine
Image Processing System	UHQ	—	UHQ
Half-tone	256 grey scale	—	256 grey scale
Automatic Document Feeder	35 pages	—	35 pages
Memory Transmission	YES	—	YES
Fax Memory	512 pages	—	256 pages (4MB)
Memory Back-up	YES (Duration - 1 hour)	—	NO
Dual Access	YES	—	YES
One-touch Dials/Coded Dials	7/192	—/—	7/100
Group Dial	198	—	7 (Max. 50 locations)
Redial	YES (automatic and manual)	—	YES (automatic and manual)
Answering Machine Hook-up	YES	—	YES
Remote Reception	YES	—	YES
Sequential Broadcast	YES (Max. 201 locations)	—	YES (Max. 123 locations)
Error Correction Mode (ECM)	YES	—	YES
Memory Reception	YES (512 pages) ³	—	YES (512 pages) ³
Polling	NO	—	NO
SCANNER FUNCTIONS			
Scanner Type	Colour Flatbed	Colour Flatbed	Colour Flatbed
Scanner Resolution	600 x 1200 dpi (9600 x 9600 dpi enhanced)	600 x 1200 dpi (9600 x 9600 dpi enhanced)	600 x 1200 dpi (9600 x 9600 dpi enhanced)
Colour Scanning Depth	24 bit/24 bit (in/out)	24 bit/24 bit (in/out)	24 bit/24 bit (in/out)
Greyscale Gradation	256 grey scale	256 grey scale	256 grey scale
Compatibility	TWAIN, WIA	TWAIN, WIA	TWAIN, WIA
OCR Bundle	YES	YES	YES
COPIER FUNCTIONS			
Copy Resolution	600 x 600 dpi	600 x 600 dpi	600 x 600 dpi
Copy Modes	Text, Photo, Text and Photo	Text, Photo, Text and Photo	Text, Photo, Text and Photo
Copy Speed	20 copies per minute	20 copies per minute	20 copies per minute
Multiple Copy	Up to 99 copies	Up to 99 copies	Up to 99 copies
Zoom Ratio	50% - 200%	50% - 200%	50% - 200%
First Copy Output Time (FCOT)	8.5 seconds	8.5 seconds	9.6 seconds
Other Features	2-in-1 copy, memory sort, Reduction, Enlargement, Duplex (only 1 to 2 sided), Secure Department ID	2-in-1 copy, memory sort, Reduction, Enlargement, Duplex (only 1 to 2 sided), Secure Department ID	2-in-1 copy, memory sort, Reduction, Enlargement, Duplex (only 1 to 2 sided)
PC INTERFACE AND SOFTWARE			
Interface Type	USB 2.0 Hi-Speed	USB 2.0 Hi-Speed	USB 2.0 Hi-Speed
Supported OS	Windows® 98/ME/2000/XP/Vista™/2003 Server, Mac OS X 10.2.8 - 10.4.6 (online distribution only. Printing and PC faxing, no scanning)	Windows® 98/ME/2000/XP/Vista™/2003 Server, Mac OS X 10.2.8 - 10.4.6 (online distribution only. Printing only)	Windows® 98/ME/2000/XP/Vista™, Mac OS X (Version 10.2.8 - 10.4.6), (English and online distribution only. Printing and PC faxing, no scanning)
Scan to E-mail	YES (via PC)	YES	YES (via PC)
Bundled Software	Presto!PageManager, ScanSoft OmniPage SE	Presto!PageManager, ScanSoft OmniPage SE	Presto!PageManager, ScanSoft OmniPage SE
NETWORK FEATURES			
Network Connectivity	Built-in, Printing, PC faxing, SEND functionality (SCAN to Network (SMB), E-mail, FAX, USB memory key)	Built-in Printing only	YES (with optional Axis 1650 Network Print Server)
Type	Ethernet (10BaseT/100BaseT)	Ethernet (10BaseT/100BaseT)	Ethernet (10BaseT/100BaseT)
Network Protocols	TCP/IP	TCP/IP	TCP/IP, IPX/SPX, IP
Others	—	—	SSL/TLS Support, Multiprotocol support, USB & Parallel
GENERAL SPECIFICATIONS			
Number of Language (LCD message)	24 languages	24 languages	17 languages
Dimensions without Trays (W x D x H)	390 x 442 x 370mm	390 x 442 x 370mm	390 x 432 x 370mm
Dimensions with Trays (W x D x H)	390 x 532 x 455mm	390 x 532 x 455mm	390 x 532 x 455mm
Weight	Approx. 14kg	Approx. 14kg	Approx. 12kg
Power Source	200 - 240V AC, 50 - 60Hz	200 - 240V AC, 50 - 60Hz	200 - 240V AC, 50 - 60Hz
Power Consumption	Max.: 730W, Standby: less than 12W, Sleep: Approx. 3W	Max.: 730W, Standby: less than 12W, Sleep: Approx. 3W	Max.: 650W, Standby: less than 8W, Sleep: Approx. 3.5W
Acoustic Noise Levels	Background noise level (during standby) max. 66dB or less (during printing or copying)	Background noise level (during standby) max. 66dB or less (during printing or copying)	Standby: background noise, Copy: under 66dB(A) max.

Laser All-in-Ones Specifications Chart



	i-SENSYS MF4140	i-SENSYS MF4120	i-SENSYS MF4010
TYPE			
Machine Type	Laser Flatbed All-in-One	Laser Flatbed All-in-One	Laser Flatbed All-in-One
Available Functions	Print, Copy, Colour Scan, Fax	Print, Copy, Colour Scan	Print, Copy, Colour Scan
Paper Scanning Type	Flatbed	Flatbed	Flatbed
PRINTER FUNCTIONS			
Printing Method	Monochrome Laser beam printing with built-in duplex unit	Monochrome Laser beam printing with built-in duplex unit	Monochrome Laser beam printing
Printer Language	Canon UFR II LT	Canon UFR II LT	Canon UFR II LT
Print Speed	20 ppm	20 ppm	20 ppm
Duty Cycle	10,000 pages per month (max.)	10,000 pages per month (max.)	10,000 pages per month (max.)
Print Resolution	600 x 600 dpi	600 x 600 dpi	600 x 600 dpi
Printer Memory	32MB (shared)	32MB (shared)	32MB (shared)
Cartridges	FX-10 Cartridge	FX-10 Cartridge	FX-10 Cartridge
Yield	2,000 pages (based on 5% coverage A4)	2,000 pages (based on 5% coverage A4)	2,000 pages (based on 5% coverage A4)
Smoothing	1200 x 600 dpi	1200 x 600 dpi	1200 x 600 dpi
Paper Capacity	250 sheet cassette + 1 sheet manual Multipurpose tray	250 sheet cassette + 1 sheet manual Multipurpose tray	250 sheet cassette + 1 sheet manual multipurpose tray
Paper Size	A4, B5, LTR, LGL, EXE, ENVELOPE, Index Cards	A4, B5, LTR, LGL, EXE, ENVELOPE, Index Cards	A4, B5, LTR, LGL, EXE, ENVELOPE, Index Cards
Printing Width	216mm	216mm	216mm
Toner Saver Mode	YES	YES	YES
FAX FUNCTIONS			
Stand-alone Fax	YES	NO	NO
PC Fax	YES	NO	NO
Transmission Speed	Approx. 3 seconds per page (based on ITU-T Chart No.1)	—	—
Modem Speed	Super G3, 33.6 Kbps	—	—
Compression Method	MH, MR, MMR	—	—
Fax Resolution	Standard, Fine, Super Fine	—	—
Image Processing System	UHQ	—	—
Half-tone	256 grey scale	—	—
Automatic Document Feeder	NO	—	—
Memory Transmission	YES	—	—
Fax Memory	256 pages (4MB)	—	—
Memory Back-up	NO	—	—
Dual Access	YES	—	—
One-touch Dials/Coded Dials	7/100	—/—	—/—
Group Dial	7 (max. 50 locations)	—	—
Redial	YES (automatic and manual)	—	—
Answering Machine Hook-up	YES	—	—
Remote Reception	YES	—	—
Sequential Broadcast	YES (max.123 locations)	—	—
Error Correction Mode (ECM)	YES	—	—
Memory Reception	YES (256 pages) ³	—	—
Polling	—	—	—
SCANNER FUNCTIONS			
Scanner Type	Colour Flatbed	Colour Flatbed	Colour Flatbed
Scanner Resolution	600 x 1200 dpi (9600 x 9600 dpi enhanced)	600 x 1200 dpi (9600 x 9600 dpi enhanced)	600 x 1200 dpi (9600 x 9600 dpi enhanced)
Colour Scanning Depth	24 bit/24 bit (in/out)	24 bit/24 bit (in/out)	24 bit/24 bit (in/out)
Greyscale Gradation	256 grey scale	256 grey scale	256 grey scale
Compatibility	TWAIN, WIA	TWAIN, WIA	TWAIN, WIA
OCR Bundle	YES	YES	YES
COPIER FUNCTIONS			
Copy Resolution	600 x 600 dpi	600 x 600 dpi	300 x 300 dpi
Copy Modes	Text, Photo, Text and Photo	Text, Photo, Text and Photo	Text, Photo, Text and Photo
Copy Speed	20 copies per minute	20 copies per minute	20 copies per minute
Multiple Copy	Up to 99 copies	Up to 99 copies	Up to 99 copies
Zoom Ratio	50% - 200%	50% - 200%	50% - 200%
First Copy Output Time (FCOT)	9.6 seconds	9.6 seconds	less than 9 seconds
Other Features	2-in-1 copy, memory sort, Reduction, Enlargement, Duplex (only 1 to 2 sided)	2-in-1 copy, memory sort, Reduction, Enlargement, Duplex (only 1 to 2 sided)	Memory sort, Reduction, Enlargement
PC INTERFACE AND SOFTWARE			
Interface Type	USB 2.0 Hi-Speed	USB 2.0 Hi-Speed	USB 2.0 Hi-Speed
Supported OS	Windows® 98/ME/2000/XP/Vista™/2003 Server, Mac OS X (Version 10.2.8 - 10.4.6), (English and online distribution only. Printing and PC faxing, no scanning)	Windows® 98/ME/2000/XP/Vista™, Mac OS X (English and online distribution only. Printing only)	Windows® 98/ME/2000/XP/Vista™, Mac OS X (Version 10.2.8 - 10.4.6), (English and online distribution only. Printing only)
Scan to E-mail	YES (via PC)	YES (via PC)	YES (via PC)
Bundled Software	Presto!PageManager, ScanSoft OmniPage SE	Presto!PageManager, ScanSoft OmniPage SE	Presto!PageManager, ScanSoft OmniPage SE
NETWORK FEATURES			
Network Connectivity	YES (with optional Axis 1650 Network Print Server)	YES (with optional Axis 1650 Network Print Server)	YES (with optional Axis 1650 Network Print Server)
Type	Ethernet (10BaseT/100BaseT)	Ethernet (10BaseT/100BaseT)	Ethernet (10BaseT/100BaseT)
Network Protocols	TCP/IP, IPX/SPX, IP	TCP/IP, IPX/SPX, IP	TCP/IP, IPX/SPX, IP
Others	SSL/TLS Support, Multiprotocol support, USB & Parallel	SSL/TLS Support, Multiprotocol support, USB & Parallel	SSL/TLS Support, Multiprotocol support, USB & Parallel
GENERAL SPECIFICATIONS			
Number of Language (LCD message)	17 languages	17 languages	17 languages
Dimensions without Trays (W x D x H)	390 x 432 x 297mm	390 x 432 x 297mm	390 x 432 x 297mm
Dimensions with Trays (W x D x H)	390 x 532 x 297mm	390 x 532 x 297mm	390 x 532 x 297mm
Weight	Approx. 12kg	Approx. 12kg	Approx. 12.7kg
Power Source	200 - 240V AC, 50 - 60Hz	200 - 240V AC, 50 - 60Hz	200 - 240V AC, 50 - 60Hz
Power Consumption	Max.: 650W, Standby: less than 8W, Sleep: Approx. 3.5W	Max.: 650W, Standby: less than 8W, Sleep: Approx. 3.5W	Max.: 650W, Standby: less than 8W, Sleep: Approx. 3.5W
Acoustic Noise Levels	Standby: background noise, Copy: under 66dB(A) max.	Standby: background noise, Copy: under 66dB(A) max.	Standby: background noise Copy: under 66dB(A) max.





Service Support

Canon doesn't stop at developing great products, we deliver outstanding after-sales service too. Customers can have complete confidence in their Canon technology with the following benefits;

Helpful, professional Customer Service Advisors

Our team are trained specifically to support Canon products over the phone in order to resolve customers enquiries quickly and efficiently. Customers can call our customer services Helpline on 08705 143723. Lines are open during normal working hours (9am – 5.30pm) and all calls are charged at standard National rates.

Qualified technicians

All technicians receive ongoing product training and are equipped with the tools and resources to provide a first class service.

Original Components

Canon only uses genuine spare parts and components in repairs. This ensures high product performance and protects the product warranty.

Visit www.canon.co.uk for more information.

Canon UK Ltd

Woodhatch
Reigate
Surrey
RH2 8BF
08705 143723
www.canon.co.uk

Canon (Irl) Business Equipment Ltd

Arena Road
Sandyford Industrial Estate
Dublin 18
Ireland
www.canon.ie

Not all products and services are available in all markets. All company and/or product names are trademarks and/or registered trademarks of their respective manufacturers in their markets and/or countries.

All trademarks are acknowledged. All data is based on Canon's standard testing and measuring methods.
Errors and omissions excepted.

Canon reserves the right to change specifications and physical appearance without notice.

All LCD images and print outs shown are simulated for clarity of reproduction.

you can
Canon

Canon Inc.
www.canon.com

Canon Europa NV
www.canon-europe.com


Canon UK Ltd
www.canon.co.uk

Canon (Irl) Business Equipment Ltd
www.canon.ie

Find the perfect fit with **Careers@Canon**
www.canon-europe.com/about_us/careers/



© 1986 Panda symbol WWF © WWF Registered Trademark



We Speak Image