

SII 

Teriostar

**LP-1010 MF Series
Digital Wide-Format
Network Copiers**



High Productivity

3 AO-size/minute

6 A1-size/minute

Our high-performance controller with simultaneous parallel data processing provides high speed output, even during continuous printing of different sizes.




Output Conditions
 Sample Image: AutoCAD Living room A1
 Data size: HP-GL/2 approx. 855kb
 Computer: Celeron 800Mhz, 192MB memory
 OS: Windows 2000 SP3
 Data Transfer: FTP



■ Time required for continuous 5 prints through Ethernet, FTP Transfer

High Resolution 600 DPI

The combination of 600 DPI and a single developer unit delivers superb density and excellent line acuity. Accurate copies and prints to-scale are assured with true 600 dpi printing.

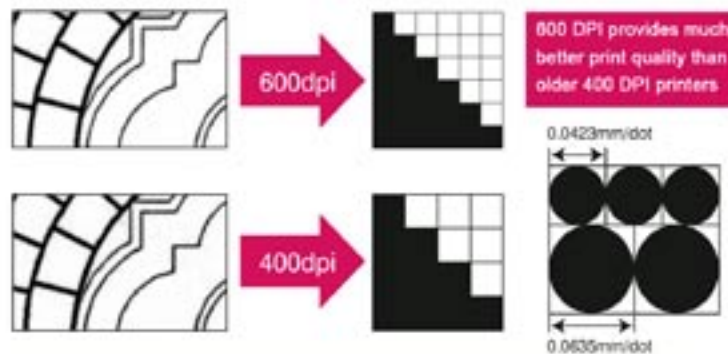

Long Print Lengths

Long prints support applications such as automotive, shipbuilding, civil engineering, bridge building, military, and energy/industrial sites.




Network Interfaces

Interfaces supported include Ethernet (100Base-TX and 10Base-T), USB-2 and Centronics. All interfaces can receive data simultaneously.

Printer Language Support

Compatible with HP-GL, HP-GL/2, HP-RTL, D-SCAN, D-Scan Raster, TIFF, and CALS.

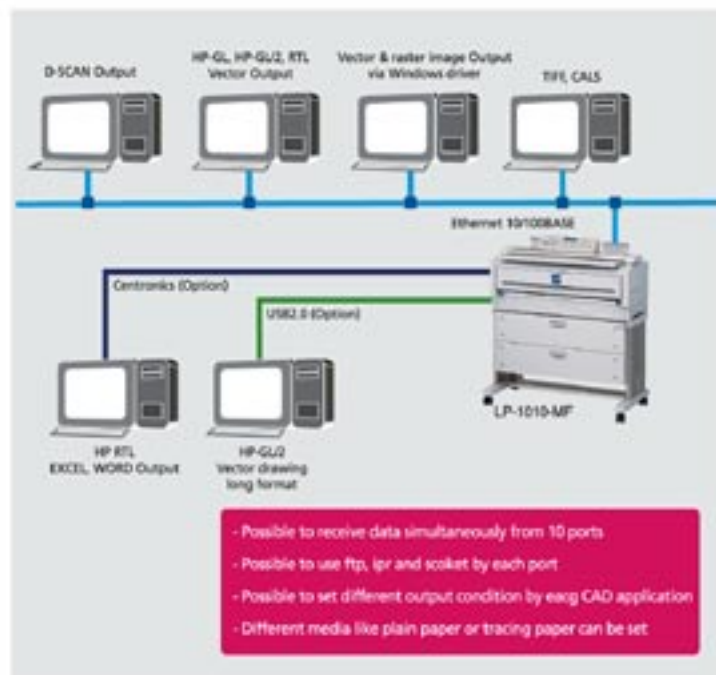

Windows Driver

Includes a Windows driver that allows you to print from any application.



Windows Driver



Web Control

Web-based Printer Control

Full printer control over the network using a standard web browser. Set up passwords for different levels of access and control

Scanning & Printing



600 DPI Copies

High resolution scanning and copying is fast and easy - enlarge or reduce drawings while retaining quality. Scale from 25% to 400%.

Automatic Roll Selection

Choose between two different paper sizes, or let the LP-1010 automatically select the appropriate paper size for your drawing.

Easy-to-use Large Display

The LP-1010 offers a large display which provides excellent visibility and easy operation of the entire copier. Allows you to change parameters quickly. Store up to 10 user-settings in memory.

Fast Copy Speed

3 A0 - Pages/min.

6 A1 - Pages/min.

Up to 20 Continuous Copies

Make up to 20 continuous copies, or make an additional copy from a previous scanned drawing.

Enlarge, reduce, change the density, or # of copies.

Digital Sorting

Copy different size drawings and automatically print them out the same size, or collate multiple copies.

Scan-To-File

Instead of copying, you can scan directly to a file for offline use or for archiving drawings.



User-Replaceable Drum - Lower Service Costs

The industry's first easy-to-replace photo cartridge drum in a wide-format LED printer allows you to replace your own photo drum - no service call required - just like a desktop laser printer! This dramatically lowers your ownership costs, lowers cost-per-copy costs, and reduces downtime.

Clean & Easy Toner Replacement



Toner cartridges use a containment system that prevents accidental toner spills - fast, easy, and clean.





Specification		LED Copier - LP-1010 MF	
Plotter	Imaging Method	Electrophotography (LED Exposure/Dry Type Development/One Component/OPC Drum)	
	Output Resolution	600 dpi	
	Continuous Output Speed	3 A0-page per min., 6 A1-page per min.	
	Warming-up Time	less than 8 min.	
	Paper Feed	2-rolls, Automatic Feed, manual by-pass	
	Paper Ejection	Front Side Ejection	
	Maximum Output Width (*1)	914 mm A0 size	
	Maximum Output Length (*2)	10 meters	
	Margin Sizes	3 mm on right/left side, 5 mm on front side, 12 mm on rear side	
	Maximum Output Area	914 mm x 10 meters	
Controller	RAM (*3)	256MB (Standard)	
	HDD	20 GB	
	Interface	Ethernet (10/100 Base-TX) USB 2.0, Centronics	
	Network Protocol	TCP/IP (ftp, lpr, socket)	
	Data Format	HP-GL, HP-GL/2, HP RTL, TIFF, CALS	
	Logical Port	10	
	Web Function	Available	
	Dimensions	Plotter 1170 (W) x 510 (D) x 1250 (H)	
	Scanner	Scanning Speed	60 mm/sec.
		Scanning Resolution	600 dpi
Maximum Scanning Width		Maximum 914 mm (A0) / Minimum 210 mm (A4)	
Maximum Scanning Length		10 meters (*3)	
Interface		Ethernet (Shared with Plotter)	
Delivery Function		Allows to Preview Function By BACK Function	
Other	Weight	less than 210 kg. (*4)	
	Power Supply	110V Model: 120V-15A, 220V Model: 230V-10A	
	Power Consumption	Operation: less than 1.350W, Standby: less than 60W	

*1: There may be some limitation of paper type. *2: Limited by resolution/memory available. *3: Actual capacity is less. *4: Without packaging.

Standard Accessories

Power Cord, 3 Toner Cartridges, 1 Waste Toner Bottle, Paper Flange (for each roll holder),
Installation CD-ROM (Windows Driver, Plot Share One LT, Manual), User Manual,
Media (Paper: 100' roll, A0/A1/A3 size, 1 each)



Energy Star Compliant Product

- Ethernet is a registered trademark of Xerox®
- HP-GL, HP-GL/2, and HP RTL are graphic languages developed by Hewlett-Packard Company.
- All other company names and products names are trademarks or registered trademarks of their respective companies.
- The brochure may be subject to change without prior notice.

SII

Seiko Instruments Europe S.A.

European Headquarter:
Avenue de Messidor, 198
1180, Brussels - Belgium

Contact:
Parc Club Orsay Université
20, rue Jean Rostand - 91400 Orsay - France
Tél.: +33 1 60 19 35 41
FAX: +33 1 60 19 35 17
www.seiko-i.com



ISO9001 Certified