


RICOH

Innovative, fast colour printers



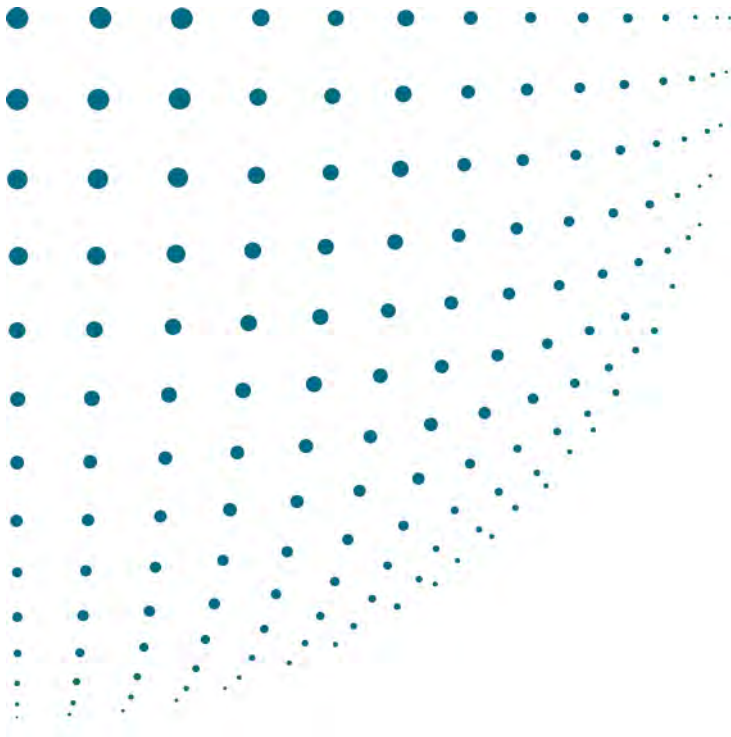


“HIGH QUALITY” HAS A NEW DEFINITION

Liquid Gel™ produces vibrant, fast-setting colour images on regular plain paper. It is smudge-free and ideal for high-speed duplex printing. The transfer belt system feeds and positions paper with pinpoint accuracy for optimum results. Moreover, the print is waterproof and resistant to the effects of sunlight.

SO EASY TO USE

Full front accessibility allows for easy reloading of paper and quick cartridge replacement. The operating panel tilts, so is easy to view. A multiple bypass tray enables the use of various types of paper. A counter records pages printed in each mode. To help you keep track of the printer's use, counter information is sent to you by e-mail.



DETAILS THAT MAKE THE DIFFERENCE

- Network compatibility (NIC as standard).
- PCL5c/6 supported (GX e3350N).
- Duplex unit as standard.
- E-mail alert feature allows fast response if problems occur.

GENERAL

Print speed:	Full colour: 29 prints per minute ¹ B/W: 29 prints per minute ¹
ISO speed:	Full colour: 11.7 prints per minute ² B/W: 12 prints per minute ²
Warm-up time:	Less than 35 seconds
First print speed:	Full colour: Less than 7.5 seconds B/W: Less than 6 seconds
Dimensions (W x D x H):	420 x 485 x 259 mm
Weight:	14 kg
Power source:	220 - 240 V, 50 - 60 Hz
Power consumption:	Print mode: Less than 36 W Energy saver mode: 2.5/7 W or less
Duty cycle:	Up to 10,000 pages per month

CONTROLLER

Printer resolution:	Up to 3,600 x 1,200 (equivalent)
Memory:	16/64 MB
Driver:	RPCS™ raster/RPCS™ raster + PCL5c, PCL6

CONNECTIVITY

Network protocol:	TCP/IP
Supported environments:	Windows® 2000/XP/Vista/Server 2003/ Server 2008 Macintosh OS X (Power PC) 10.3 - 10.5.2 Macintosh OS X (Intel) 10.4.5 - 10.5.2
Interface:	USB 1.1/2.0 Ethernet 10 base-T/100 base-TX

PAPER HANDLING

Paper input capacity:	Standard: 250-sheet paper feed unit Option: 100-sheet multi-bypass tray Maximum: 350 sheets
Paper output capacity:	150 sheets (face up)
Paper size:	A6 - A4
Paper weight:	Paper feed unit: 60 - 163 g/m ² Multi-bypass tray: 60 - 255 g/m ²
Media:	Standard tray: Plain paper, inkjet paper, glossy paper, postcards, inkjet postcards, envelopes (simplex only). Multi-bypass tray: Plain paper, inkjet paper, glossy paper, postcards, inkjet postcards, thick paper, envelopes (simplex only).
Duplexing:	Standard

CONSUMABLES

Cartridges:	Black: 1,920 sheets ³ Cyan: 1,920 sheets ³ Magenta: 1,560 sheets ³ Yellow: 1,750 sheets ³
Ink collector unit:	27,000 sheets ²

OPTIONS

100-sheet multi-bypass tray

Print speed may vary depending on the type of output.

¹ Based on RPCS™ driver (High Speed mode).

² Based on RPCS™ driver (reference data).

³ Yield measuring method: ISO/IEC 24711, Color test suite: ISO/IEC 24712.

Ricoh has designed these products to meet EC ENERGY STAR guidelines for energy efficiency.

RICOH

ISO9001: 2000 certified ISO14001 certified

All brand and/or product names are trademarks of their respective owners. Specifications and external appearance are subject to change without notice. The colour of the actual product may vary from the colour shown in the brochure. The images in this brochure are not real photographs and slight differences in detail might appear.

Copyright © 2009 Ricoh Europe PLC. All rights reserved. This brochure, its contents and/or layout may not be modified and/or adapted, copied in part or in whole and/or incorporated into other works without the prior written permission of Ricoh Europe PLC.

www.ricoh-europe.com

For more information, please contact

Ricoh Hungary Kft.
Váci út 140.
H-1138 Budapest
(+36 1) 270 9797
(+36 1) 270 9795
www.ricoh.hu

